

The following reference:

Publication: WO 99/14878
Publication Date: March 25, 1999
Applicant: QUALCOMM INCORPORATED

is the English Translation of the following reference beginning on p. 32:


Publication: JP-2001-517017
Publication Date: October 2, 2001
Applicant: QUALCOMM INCORPORATED



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04J 11/00, 13/02, H04L 27/26, 5/02, 25/03		A1	(11) International Publication Number: WO 99/14878
		(43) International Publication Date: 25 March 1999 (25.03.99)	
(21) International Application Number: PCT/US98/19335		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 16 September 1998 (16.09.98)		<p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	
(30) Priority Data: 08/931,536 16 September 1997 (16.09.97) US			
(71) Applicant: QUALCOMM INCORPORATED [US/US]: 6455 Lusk Boulevard, San Diego, CA 92121 (US).			
(72) Inventor: JOU, Yu-Choun; 9979 Riverhead Drive, San Diego, CA 92129 (US).			
(74) Agents: MILLER, Russell, B. et al.; Qualcomm Incorporated, 6455 Lusk Boulevard, San Diego, CA 92121 (US).			

(54) Title: A METHOD OF AND APPARATUS FOR TRANSMITTING DATA IN A MULTIPLE CARRIER SYSTEM

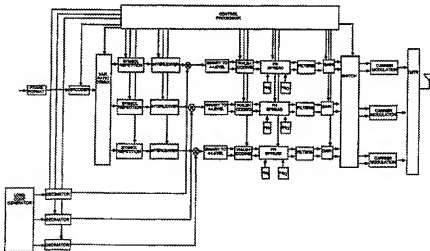

(57) Abstract

A method of an apparatus for transmitting data in a multiple carrier system comprises encoding data and dividing the resulting encoded symbols for transmission on different frequencies. The transmitter comprises a control processor (50) for determining the capacity of each of a plurality of channels and selecting a data rate for each channel depending on the determined capacity. A plurality of transmission subsystems (56 to 72) are responsive to the control processor (50). Each transmission subsystem is associated with a respective one of the plurality of channels for scrambling encoded data with codes unique to the channel for transmission in the channel. A variable demultiplexer (56) under the control of the control processor (50) demultiplexes the encoded data into the plurality of transmission subsystems at a demultiplexing rate derived from the data rates selected for the channels by the controller. In one embodiment of the transmission subsystems, the encoded symbols are provided to a symbol repetition unit (58) which keeps the symbol rate of data to be transmitted fixed. In another embodiment, no symbol repetition is provided and variable length Walsh sequences are used to handle data rate variations.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	NL	Netherlands	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	ML	Mali	UA	Ukraine
BR	Brazil	IL	Israel	MN	Mongolia	UG	Uganda
BY	Belarus	IS	Iceland	MR	Mauritania	US	United States of America
CA	Canada	IT	Italy	MW	Malawi	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	MX	Mexico	VN	Viet Nam
CG	Congo	KE	Kenya	NE	Niger	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NL	Netherlands	ZW	Zimbabwe
CJ	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NO	Norway		
CM	Cameroon			NZ	New Zealand		
CN	China	KR	Republic of Korea	PL	Poland		
CU	Cuba	KZ	Kazakhstan	PT	Portugal		
CZ	Czech Republic	LC	Saint Lucia	RO	Romania		
DE	Germany	LI	Liechtenstein	RU	Russian Federation		
DK	Denmark	LK	Sri Lanka	SD	Sudan		
EE	Estonia	LR	Liberia	SE	Sweden		
				SG	Singapore		

A METHOD OF AND APPARATUS FOR TRANSMITTING DATA IN A MULTIPLE CARRIER SYSTEM

BACKGROUND OF THE INVENTION

I. Field of the Invention

The present invention relates to a method of and apparatus for transmitting data in a multiple carrier system. The present invention may be used for maximizing system throughput and increasing signal diversity by dynamically multiplexing signals onto multiple carriers in a spread spectrum communication system.

II. Description of the Related Art

It is desirable to be able to transmit data at rates which are higher than the maximum data rate of a single CDMA channel. A traditional CDMA channel (as standardized for cellular communication in the United States) is capable of carry digital data at a maximum rate of 9.6 bits per second using a 64 bit Walsh spreading function at 1.2288 MHz.

Many solutions to this problem have been proposed. One solution is to allocate multiple channels to the users and allow those users to transmit and receive data in parallel on the plurality of channels available to them. Two methods for providing multiple CDMA channels for use by a single user are described in co-pending U.S. Patent Application Serial No. 08/431,180, entitled "METHOD AND APPARATUS FOR PROVIDING VARIABLE RATE DATA IN A COMMUNICATIONS SYSTEM USING STATISTICAL MULTIPLEXING", filed April 28, 1997 and U.S. Patent Application Serial No. 08/838,240, entitled "METHOD AND APPARATUS FOR PROVIDING VARIABLE RATE DATA IN A COMMUNICATIONS SYSTEM USING NON-ORTHOGONAL OVERFLOW CHANNELS", filed April 16, 1997, both of which are assigned to the assignee of the present invention and are incorporated by reference herein. In addition, frequency diversity can be obtained by transmitting data over multiple spread spectrum channels that are separated from one another in frequency. A method and apparatus for redundantly transmitting data over multiple CDMA channels is described in U.S. Patent No. 5,166,951, entitled "HIGH CAPACITY SPREAD SPECTRUM CHANNEL", which is incorporated by reference herein.

The use of code division multiple access (CDMA) modulation techniques is one of several techniques for facilitating communications in which a large number of system users are present. Other multiple access communication system techniques, such as time division multiple access (TDMA), frequency division multiple access (FDMA) and AM modulation schemes such as amplitude companded single sideband (ACSSB) are known in the art. However, the spread spectrum modulation technique of CDMA has significant advantages over these other modulation techniques for multiple access communication systems.

The use of CDMA techniques in a multiple access communication system is disclosed in U.S. Patent No. 4,901,307, entitled "SPREAD SPECTRUM MULTIPLE ACCESS COMMUNICATION SYSTEM USING SATELLITE OR TERRESTRIAL REPEATERS", assigned to the assignee of the present invention and incorporated by reference herein. The use of CDMA techniques in a multiple access communication system is further disclosed in U.S. Patent No. 5,103,459, entitled "SYSTEM AND METHOD FOR GENERATING SIGNAL WAVEFORMS IN A CDMA CELLULAR TELEPHONE SYSTEM", assigned to the assignee of the present invention and incorporated by reference herein. Code division multiple access communications systems have been standardized in the United States in Telecommunications Industry Association Interim Standard IS-95, entitled "Mobile Station-Base Station Compatibility Standard for Dual Mode Wideband Spread Spectrum Cellular System", which is incorporated by reference herein.

The CDMA waveform by its inherent nature of being a wideband signal offers a form of frequency diversity by spreading the signal energy over a wide bandwidth. Therefore, frequency selective fading affects only a small part of the CDMA signal bandwidth. Space or path diversity on the forward/reverse link is obtained by providing multiple signal paths through simultaneous links to/from a mobile user through two or more antennas, cell sectors or cell-sites. Furthermore, path diversity may be obtained by exploiting the multipath environment through spread spectrum processing by allowing a signal arriving with different propagation delays to be received and processed separately. Examples of the utilization of path diversity are illustrated in co-pending U.S. Patent No. 5,101,501 entitled "SOFT HANDOFF IN A CDMA CELLULAR TELEPHONE SYSTEM", and U.S. Patent No. 5,109,390 entitled "DIVERSITY RECEIVER IN A CDMA CELLULAR TELEPHONE SYSTEM", both assigned to the assignee of the present invention and incorporated by reference herein.

FIG. 1 illustrates a transmission scheme for a multiple-carrier code division multiple access (CDMA) system in which each carrier carries a fixed fraction of the transmitted data. Variable rate frame of information bits are provided to encoder 2 which encodes the bits in accordance with a convolutional encoding format. The encoded symbols are provided to symbol repetition means 4. Symbol repetition means 4 repeats the encoded symbols so as to provide a fixed rate of symbols out of symbol repetition means 4, regardless of the rate of the information bits.

The repeated symbols are provided to block interleaver 6 which rearranges the sequence in which the symbols are to be transmitted. The interleaving process, coupled with the forward error correction, provides time diversity which aids in the reception and error recovery of the transmitted signal in the face of burst errors. The interleaved symbols are provided to data scrambler 12. Data scrambler 12 multiplies each interleaved symbol by +1 or -1 according to a pseudonoise (PN) sequence. The pseudonoise sequence is provided by passing a long PN sequence generated by long code generator 8 at the chip rate through decimator 10 which selectively provides a subset of the chips of the long code sequence at the rate of the interleaved symbol stream.

The data from data scrambler 12 is provided to demultiplexer (DEMUX) 14. Demultiplexer 14 divides the data stream into three equal sub-streams. The first sub-stream is provided to transmission subsystem 15a, the second sub-stream to transmission subsystem 15b and the third sub-stream to transmission subsystem 15c. The subframes are provided to serial-to-parallel converters (BINARY TO 4 LEVEL) 16a-16c. The outputs of serial to parallel converters 16a-16c are quaternary symbols (2bits/symbol) to be transmitted in a QPSK modulation format

The signals from serial-to-parallel converters 16a-16c are provided to Walsh coders 18a-18c. In Walsh coders 18a-18c, the signal from each converter 16a-16c is multiplied by a Walsh sequence consisting of ± 1 values. The Walsh coded data is provided to QPSK spreaders 20a-20c, which spread the data in accordance with two short PN sequences. The short PN sequence spread signals are provided to amplifiers 22a-22b which amplify the signals in accordance with a gain factor.

The system described above suffers from a plurality of drawbacks. First, because the data is to be provided in equal sub-streams on each of the carriers, the available numerology is limited to frames with a number of code symbols that will divide evenly by a factor of three. Table 1 below

illustrates the limited number of possible rate sets which are available using the transmission system illustrated in FIG. 1.

Walsh Function (QPSK Symbol) Rate [sps]	Number of Walsh Functions per 20ms		Length of Walsh Function [chips]	Symbol Rate [sps] (After Repetition)	Number of Symbols per 20 ms.	
1228800	24576	$3 \cdot (2^{13})$	1	2457600	49152	$3 \cdot (2^{14})$
614400	12288	$3 \cdot (2^{12})$	2	1228800	24576	$3 \cdot (2^{13})$
307200	6144	$3 \cdot (2^{11})$	4	614400	12288	$3 \cdot (2^{12})$
153600	3072	$3 \cdot (2^{10})$	8	307200	6144	$3 \cdot (2^{11})$
76800	1536	$3 \cdot (2^9)$	16	153600	3072	$3 \cdot (2^{10})$
38400	768	$3 \cdot (2^8)$	32	76800	1536	$3 \cdot (2^9)$
19200	384	$3 \cdot (2^7)$	64	38400	768	$3 \cdot (2^8)$
9600	192	$3 \cdot (2^6)$	128	19200	384	$3 \cdot (2^7)$
4800	96	$3 \cdot (2^5)$	256	9600	192	$3 \cdot (2^6)$
2400	48	$3 \cdot (2^4)$	512	4800	96	$3 \cdot (2^5)$
1200	24	$3 \cdot (2^3)$	1024	2400	48	$3 \cdot (2^4)$
600	12	$3 \cdot (2^2)$	2048	1200	24	$3 \cdot (2^3)$
300	6	$3 \cdot (2^1)$	4096	600	12	$3 \cdot (2^2)$
150	3	$3 \cdot (2^0)$	8192	300	6	$3 \cdot (2^1)$

5

Table 1

As illustrated in Table 1, because the symbols are evenly distributed to the three carriers, the total data rate is limited by the carrier with the least power available or requiring the highest SNR. That is the total data rate is equal to three times the data rate of the "worst" link (here the worst means the one requiring the highest SNR or having the least power available). this reduces the system throughput, because the worst link's rate is always chosen as the common rate for all three carriers, which results in under utilization of the channel resource on the two better links.

Second, frequency dependent fading can severely affect one of the frequencies while having a limited effect on the remaining frequencies. This implementation is inflexible and does not allow transmission of a frame to be provided in a way that reduces the effects of the poor channel. Third, because of frequency dependent fading, the fading will typically always affect the same groups of symbols of each frame. Fourth, were the

implementation to be superimposed on a speech transmission system there is no good way to balance the loads carried on the different frequencies on a frame by frame basis in the face of variable speech activities in each frame. This results in loss in total system throughput. And fifth, for a system with only three frequency channels, with the implementation described, there is no method of separating the speech and data so as to provide the data on one frequency or set of frequencies and the speech on a different frequency or set of frequencies. This results in a loss of system throughput as mentioned above.

Therefore, there is a need felt for an improved multi-carrier CDMA communication system which offers greater flexibility in numerology and load balancing, better resolution in data rates supported, and which offers superior performance in the face of frequency dependent fading and uneven loading.

SUMMARY OF THE INVENTION

In one aspect the invention provides a transmitter for transmitting data at a data rate in a plurality of channels each having a capacity less than the data rate, the transmitter comprising: a controller for determining the capacity of each of a plurality channels and selecting a data rate for each channel depending on the determined capacity; a plurality of transmission subsystems responsive to the controller and each associated with a respective one of the plurality of channels for scrambling encoded data with codes unique to the channel for transmission in the channel; and a variable demultiplexer responsive to the controller for demultiplexing the encoded data into the plurality of transmission subsystems at a demultiplexing rate derived from the data rates selected for the channels by the controller.

In another aspect the invention provides a receiver comprising: a receiving circuit for receiving signals simultaneously in a plurality of channels each of which signals define scrambled encoded symbols which together represent data from a common origin; a controller for determining a symbol rate for the signals in each channel; a plurality of receiving subsystems responsive to the controller and each associated with a respective one of the plurality of channels for descrambling encoded symbols with codes unique to the channel to enable the data to be extracted therefrom; and a variable multiplexer responsive to the controller for multiplexing the data from the plurality of receiving subsystems at a

multiplexing rate derived from the symbol rates determined for the channels by the controller onto an output.

In a further aspect the invention provides a wireless transmitter, comprising: encoder for receive a set of information bits and encoding said
5 information bits to provide a set of code symbols; and a transmission subsystem for receiving said code symbols and for providing a subset of said code symbols on a first carrier frequency and the remaining symbols on at least one additional carrier frequency.

The invention also provides a method of transmitting data at a data
10 rate in a plurality of channels each having a capacity less than the data rate, the method comprising: determining the capacity of each of a plurality of channels and selecting a data rate for each channel depending on the determined capacity; scrambling encoded data with codes unique to the channel for transmission in the channel; and demultiplexing the encoded
15 data into the plurality of channels at a demultiplexing rate derived from the data rates selected for the channels by the controller.

The invention further provides a method of receiving data, the method comprising: receiving signals simultaneously in a plurality of channels each of which signals define scrambled encoded symbols which
20 together represent data from a common origin; determining a symbol rate for the signals in each channel; descrambling encoded symbols in each channel with codes unique to the channel to enable the data to be extracted therefrom; and multiplexing the descrambled data from the plurality of channels at a multiplexing rate derived from the symbol rates determined
25 for the channels.

To better utilize the channel resource, it's necessary to be able to transmit a different data rate on each carrier according to the channel condition and the available power on each channel. One way of doing this is by changing the ratio of the inverse-multiplexing on to each of the carriers.
30 Instead of distributing the symbols with a ratio of 1:1:1, a more arbitrary ratio can be used together with different repetition schemes as long as the resulted symbol rate on each carrier is a factor of some Walsh function rate. Walsh function rate can be 1228800, 614400, 307200,..., 75 for Walsh function length from 1 to 16384.

Given the Walsh function length, if the symbol rate is lower than the
35 Walsh function rate, symbol repetition is used to "match" the rate. The repetition factor can be any number, integer or fractional. It will be understood by one skilled in the art that when repetition is present, the total transmit power can be proportionately reduced to keep the code symbol

energy constant. The Walsh function length may or may not be the same on the three carriers, depending on whether we need to save code channels. For example, if the supportable code symbol rate on the three channels are 153600 sps, 30720 sps and 102400 sps (for rate 1/2 coding, these correspond to data rates of 76.8 kbps, 15.36 kbps and 51.2 kbps, respectively - the total data rate is 143.36 kbps), then the inverse-multiplexing ratio will be 15:3:10.

If a Walsh function of length 8 is used for all three channels (assuming QPSK modulation with a QPSK symbol rate of 153.6 Ksps), then each code symbol is transmitted twice, 10 times, and three times on the three channels, respectively. Additional time diversity can be obtained if the repeated symbols are further interleaved. In an alternative embodiment, different Walsh function lengths are used. For example, Walsh functions for the three channels in the example of above of length 16, 16 and 8 respectively can be used, with each code symbol transmitted once on the first channel, five times on the second, and three times on the third.

The above approach does not affect the encoder since it has to be able to handle the highest data rate anyway. All that is changed is the number of data octets at the encoder input. However, this approach does have an impact on the implementation of the interleaver because the interleaver will have many possible sizes (in terms of number of symbols) if all combinations of data rates on the three channels are allowed. One alternative to the above approach which mitigates this problem is to inverse-multiplex the code symbols out of the encoder to the three carriers directly and perform interleaving of repeated code symbols on each channel separately. This simplifies the numerology and reduces the number of possible interleaver sizes on each channel.

BRIEF DESCRIPTION OF THE DRAWINGS

Further features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below of embodiments of the invention when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

FIG. 1 is a block diagram illustrating a multiple frequency CDMA communication system with fixed rates and carriers;

FIG. 2 is a block diagram illustrating a transmission system embodying the present invention;

FIG. 3 is a block diagram illustrating a receiver system embodying the present invention; and

FIG. 4 is a table of code channel Walsh symbols in a traditional IS-95 CDMA communication system.

5

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIG. 2, which is a block diagram illustrating a transmission system embodying the present invention, the first operation to be performed is to determine the amount of data which can be supported on each of the carriers. Three such carriers are illustrated in FIG. 2, though one skilled in the art will realize that the present invention is easily extended to any number of carriers. Control processor 50 based on a set of factors such as the loading on each of the carriers, the amount of data queued for transmission to the mobile station and the priority of the information to be transmitted to the mobile station determines the rate of data transmission on each of the carriers.

After having selected the data rate to be transmitted on each of the carriers, control processor 50 selects a modulation format that is capable of transmitting data at the selected rate. In the exemplary embodiment, different length Walsh sequences are used to modulate the data depending on the rate of the data to be transmitted. The use of different length Walsh sequences selected to modulate the data depending on the rate of the data to be transmitted is described in detail in co-pending U.S. Patent Application Serial No. 08/654,443, filed May 28, 1996, entitled "HIGH RATE DATA WIRELESS COMMUNICATION SYSTEM", which is assigned to the assignee of the present invention and incorporated by reference herein. In an alternative embodiment, the high rate data can be supported by bundling of CDMA channels as described in the aforementioned Patent Applications Serial Nos. 08/431,180 and 08/838,240.

Once the rates which will be supported on each of the carriers is selected then control processor 50 calculates an inverse multiplexing ratio that will determine the amount of each transmission that will be carried on each of the carriers. For example, if the supportable code symbol rate on the three channels are 153600 sps, 30720 sps and 102400 sps (for rate 1/2 coding, these correspond to data rates of 76.8 kbps, 15.36 kbps and 51.2 kbps, respectively - the total data rate is 143.36 kbps), then the inverse-multiplexing ratio will be 15:3:10.

In the exemplary embodiment, frames of information bits are provided to frame formatter 52. In the exemplary embodiment, formatter 52 generates and appends to the frame a set of cyclic redundancy check (CRC) bits. In addition, formatter 52 appends a predetermined set of tail bits. The implementation and design of frame formatters are well known in the art, an example of a typical frame formatter is described in detail in U.S. Patent No. 5,600,754, entitled "METHOD AND SYSTEM FOR THE ARRANGEMENT OF VOCODER DATA FOR THE MASKING OF TRANSMISSION CHANNEL INDUCED ERRORS", which is assigned to the assignee of the present invention and incorporated by reference herein.

The formatted data is provided to encoder 54. In the exemplary embodiment, encoder 54 is a convolutional encoder, though the present invention can be extended to other forms of encoding. A signal from control processor 50 indicates to encoder 54 the number of bits to be encoded in this transmission cycle. In the exemplary embodiment, encoder 54 is a rate 1/4 convolutional encoder with a constraint length of 9. It should be noted that because of the additional flexibility provided by the present invention, essentially any encoding format can be used.

The encoded symbols from encoder 54 are provided to variable ratio de-multiplexer 56. Variable ratio de-multiplexer 56 provides the encoded symbols to a set of outputs based on a symbol output signal provided by control processor 50. In the exemplary embodiment, there are three carrier frequencies and control processor 50 provides a signal indicative of the number of encoded symbols to be provided on each of the three outputs. As one skilled in the art will appreciate, the present invention is easily extended to an arbitrary number of frequencies.

The encoded symbols provided on each of the outputs of variable ratio de-multiplexer 56 are provided to a corresponding symbol repetition means 58a-58c. Symbol repetition means 58a-58c generate repeated versions of the encoded symbols so that the resultant symbol rate matches with the rate of data supported on that carrier and the in particular matches Walsh function rate used on that carrier. The implementation of repetition generators 58a-58c is known in the art and an example of such is described in detail in U.S. Patent No. 5,629,955, entitled "Variable Response Filter", which is assigned to the assignee of the present invention and incorporated by reference herein. Control processor 50 provides a separate signal to each repetition generator 58a-58c indicating the rate of symbols on each carrier or alternatively the amount of repetition to be provided on each carrier. In response to the signal from control processor 50, repetition means 58a-58c

generate the requisite numbers of repeated symbols to provide the designated symbol rates. It should be noted that in the preferred embodiment, the amount of repetition is not limited to integer number wherein all symbols are repeated the same number of times. A method for providing non-integer repetition is described in detail in co-pending U.S. Patent Application Serial No. 08/886,815, filed March 26, 1997, entitled "METHOD AND APPARATUS FOR TRANSMITTING HIGH SPEED DATA IN A SPREAD SPECTRUM COMMUNICATIONS SYSTEM", which is assigned to the assignee of the present invention and incorporated by reference herein.

The symbols from repetition generators 58a-58c are provided to a corresponding one of interleavers 60a-60c which reorders the repeated symbols in accordance with a predetermined interleaver format. Control processor 50 provides an interleaving format signal to each of interleavers 60a-60c which indicates one of a predetermined set of interleaving formats. In the exemplary embodiment, the interleaving format is selected from a predetermined set of bit reversal interleaving formats.

The reordered symbols from interleavers 60a-60c are provided to data scramblers 62a-62c. Each of data scramblers 62a-62c changes the sign of the data in accordance with a pseudonoise (PN) sequence. Each PN sequence is provided by passing a long PN code generated by long code or PN generator 82 at the chip rate through a decimator 84a-84c, which selectively provides ones of the spreading symbols to provide a PN sequence at a rate no higher than that provided by PN generator 82. Because the symbol rate on each carrier may be different from one another, the decimation rate of decimators 84a-84c may be different. Decimators 84a-84c are sample and hold circuits which sample the PN sequence out of PN generator 82 and continue to output that value for a predetermined period. The implementation of PN generator 82 and decimators 84a-84c are well known in the art and are described in detail in the aforementioned U.S. Patent No. 5,103,459. Data scramblers 62a-62c exclusively-OR the binary symbols from interleavers 60a-60c with the decimated pseudonoise binary sequences from decimators 84a-84c.

The binary scrambled symbol sequences are provided to serial to parallel converters (BINARY TO 4-LEVEL) 64a-64c. Two binary symbols provided to converters 64a-64c are mapped to a quaternary constellation with values $(\pm 1, \pm 1)$. The constellation values are provided on two outputs from converters 62a-62c. The symbol streams from converters 64a-64c are separately provided to Walsh spreaders 66a-66c.

There are many methods of providing high speed data in a code division multiple access communication system. In the preferred embodiment, the Walsh sequence length is varied in accordance with the rate of the data to be modulated. Shorter Walsh sequences are used to modulate higher speed data and longer Walsh sequences are used to modulate lower rate data. For example, a 64 bit Walsh sequence can be used to transmit data at 19.2 Ksps. However, a 32 bit Walsh sequence can be used to modulate data at 38.4 Ksps.

A system describing variable length Walsh sequence modulation is described in detail in co-pending U.S. Patent Application Serial No. 08/724,281, entitled "HIGH DATA RATE SUPPLEMENTAL CHANNEL FOR CDMA TELECOMMUNICATIONS SYSTEM", filed January 15, 1997 and incorporated by reference herein. The length of the Walsh sequences used to modulate the data depend on the rate of the data to be transmitted. FIG. 4 illustrates the Walsh functions in a traditional IS-95 CDMA system.

In the preferred embodiment of the invention, the number of Walsh channels allocated for the high-rate data can be any value 2^N where $N = \{2, 3, 4, 5, 6\}$. The Walsh codes used by Walsh coders 66a-66c are $64/2^N$ symbols long, rather than the 64 symbols used with the IS-95 Walsh codes. In order for the high-rate channel to be orthogonal to the other code channels with 64-symbol Walsh codes, 2^N of the possible 64 quaternary-phase channels with 64-symbol Walsh are eliminated from use. Table I provides a list of the possible Walsh codes for each value of N and the corresponding sets of allocated 64-symbol Walsh codes.

N	Walsh _i	Allocated 64-Symbol Walsh Codes
2	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	0, 16, 32, 48
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	1, 17, 33, 49
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	2, 18, 34, 50
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	3, 19, 35, 51
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	4, 20, 36, 52
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	5, 21, 37, 53
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	6, 22, 38, 54
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	7, 23, 39, 55
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	8, 24, 40, 56
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	9, 25, 41, 57
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	10, 26, 42, 58
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	11, 27, 43, 59
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	12, 28, 44, 60
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	13, 29, 45, 61
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	14, 30, 46, 62
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	15, 31, 47, 63
3	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	0, 8, 16, 24, 32, 40, 48, 56
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	1, 9, 17, 25, 33, 41, 49, 57
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	2, 10, 18, 26, 34, 42, 50, 58
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	3, 11, 19, 27, 35, 43, 51, 59
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	4, 12, 20, 28, 36, 44, 52, 60
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	5, 13, 21, 29, 37, 45, 53, 61
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	6, 14, 22, 30, 38, 46, 54, 62
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	7, 15, 23, 31, 39, 47, 55, 63
4	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	0, 4, 8, ..., 60
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	1, 5, 9, ..., 61
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	2, 6, 10, ..., 62
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	3, 7, 11, ..., 63
5	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	0, 2, 4, ..., 62
	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	1, 3, 5, ..., 63
6	+,+,+,+,+,+,+,+,+,+,+,+,+,+,+,+	0, 1, 2, ..., 63

Table I.

The + and - indicate a positive or negative integer value, where the preferred integer is 1. As is apparent, the number of Walsh symbols in each Walsh code varies as N varies, and in all instances is less than the number

of symbols in the IS-95 Walsh channel codes. Regardless of the length of the Walsh code, in the described embodiment of the invention the symbols are applied at a rate of 1.2288 Megachips per second (Mcps). Thus, shorter length Walsh codes are repeated more often. Control processor 50 provides a signal
5 to Walsh coding elements 66a-66c which indicates the Walsh sequence to be used to spread the data.

Alternative methods for transmitting high rate data in CDMA communication system also include methods generally referred to as channel bundling techniques. The present invention is equally applicable to
10 the channel bundling methods for providing high speed data in a CDMA communication system. One method of providing channel bundled data is to provide a plurality of Walsh channels for use by a signal user. This method is described in detail in the aforementioned U.S. Patent Application Serial No. 08/739,482. An alternative channel bundling technique is to
15 provide the user with use of one Walsh code channel but to differentiate the signals from one another by means of different scrambling signals as described in detail in co-pending U.S. Patent Application Serial No. 08/838,240.

The Walsh spread data is provided to PN spreaders 68a-68c, which
20 apply a short PN sequence spreading on the output signals. In the exemplary embodiment, the PN spreading is performed by means of a complex multiplication as described in detail in the aforementioned co-pending U.S. Patent Application Serial No. 08/784,281. Data channels D_I and D_Q are complex multiplied, as the first real and imaginary terms
25 respectively, with spreading codes PN_I and PN_Q as the second real and imaginary terms respectively, yielding in-phase (or real) term X_I and quadrature-phase (or imaginary) term X_Q . Spreading codes PN_I and PN_Q are generated by spreading code generators 67 and 69. Spreading codes PN_I and PN_Q are applied at 1.2288 Mcps. Equation (1) illustrates the complex
30 multiplication performed.

$$(X_I + jX_Q) = (D_I + jD_Q)(PN_I + jPN_Q) \quad (1)$$

In-phase term X_I is then low-pass filtered to a 1.2288 MHz bandwidth
35 (not shown) and upconverted by multiplication with in-phase carrier $\cos(\omega_c t)$. Similarly, quadrature-phase term X_Q is low-pass filtered to a 1.2288 MHz bandwidth (not shown) and upconverted by multiplication with quadrature-phase carrier $\sin(\omega_c t)$. The upconverted X_I and X_Q terms are summed yielding forward link signal $s(t)$. The complex multiplication

allows quadrature-phase channel set to remain orthogonal to the in-phase channel set and therefore to be provided without adding additional interference to the other channels transmitted over the same path with perfect receiver phase recovery.

5 The PN spread data is, then, provided to filters 70a-70c which spectrally shape the signals for transmission. The filtered signals are provided to gain multipliers 72a-72c, which amplify the signals for each carrier. The gain factor is supplied to gain elements 72a-72c by control processor 50. In the exemplary embodiment, control processor 50 selects the
10 gain factor for each carrier in accordance with the channel condition and the rate of the information data to be transmitted on that carrier. As is known by one skilled in the art, data that is transmitted with repetition can be transmitted with lower symbol energy than data without repetition.

The amplified signals are provided to an optional switch 74. Switch
15 74 provides the additional flexibility of channel hopping the data signals onto different carriers. Typically, switch 74 is only used when the number of carriers actually used to transmit the signal is smaller than the total number of possible carriers (3 in the present example).

The data is passed by switch 74 to carrier modulators 76a-76c. Each of
20 carrier modulators 76a-76c upconvert the data to a different predetermined frequency. The upconverted signals are provided to transmitter 78 where they are combined with other similarly processed signals, filtered and amplified for transmission through antenna 80. In the exemplary embodiment, the amplified frequency upon which each of the signals are
25 transmitted varies with time. This provides additional frequency diversity for the transmitted signals. For example a signal that is currently being transmitted through carrier modulator 76a will at predetermined time interval be switched so as to be transmitted on a different frequency through carrier modulators 76b or 76c. In accordance with a signal from control
30 processor 50, switch 74 directs an amplified input signal from gain multiplier 72a-72c to an appropriate carrier modulator 76a-76c.

Turning to FIG. 3, a receiver system embodying the present invention is illustrated. The signal received at antenna 100 is passed to receiver (RCVR) 102, which amplifies and filters the signal before providing it to
35 switch 104. The data is provided through switch 104 to an appropriate carrier demodulator 106a-106c. It will be understood by one skilled in the art that although the receiver structure is described for the reception of a signal transmitted on three frequencies, the present invention can easily be

extended to an arbitrary number of frequencies consecutive to one another or not.

When the carriers on which the data is transmitted are rotated or hopped to provide additional frequency diversity, switch 104 provides the received signal to a selected carrier demodulator 106a-106c in response to a control signal from control processor 125. When the carrier frequencies are not hopped or rotated, then switch 104 is unnecessary. Each of carrier demodulators 106a-106c Quaternary Phase Shift Keying (QPSK) demodulate the received signal to baseband using a different downconversion frequency to provide a separate I and Q baseband signals.

The downconverted signals from each of carrier demodulators 106a-106c are provided to a corresponding PN despreader 108a-108c which removes the short code spreading from the downconverted data. The I and Q signals are despread by complex multiplication with a pair of short PN code. The PN despread data is provided to Walsh demodulators 110a-110c, which uncover the data in accordance with the assigned code channel sequences. In the exemplary embodiment, Walsh functions are used in the generation and reception of the CDMA signals but other forms of code channel generation are equally applicable. Control processor 125 provides a signal to Walsh demodulators 110a-110c indicating the Walsh sequences to be used to uncover the data.

The Walsh despread symbols are provided to parallel-to-serial converters (4-LEVEL TO BINARY) 112a-112c, which map the 2-dimensional signal into a 1-dimensional signal. The symbols are then provided to descramblers 114a-114c. Descramblers 114a-114c descramble the data in accordance with a decimated long code sequence generated as described with respect to the decimated long code sequences used to scramble the data in FIG. 2.

The descrambled data is provided to de-interleavers (DE-INT) 116a-116c. De-interleavers 116a-116c reorder the symbols in accordance with selected de-interleaver formats that are provided by control processor 125. In the exemplary embodiment, control processor 125 provides a signal indicative of the size of the deinterleaver and the scheme of de-interleaving to each of de-interleavers 116a-116c. In the exemplary embodiment, the de-interleaving scheme is selected from a predetermined set of bit reversal de-interleaving schemes.

The de-interleaved symbols are then provided to symbol combiners 118a-118c which coherently combine those repeatedly transmitted symbols. The combined symbols (soft decisions) are then provided to variable ratio

multiplexer 120 which reassembles the data stream and provides the reassembled data stream to decoder 122. In the exemplary embodiment decoder 122 is a maximum likelihood decoder, the implementation of which is well known in the art. In the exemplary embodiment, decoder 122
5 contains a buffer (not shown) which waits until an entire frame of data has been provided to it before beginning the decoding process. The decoded frame is provided to CRC check means 124 which determines whether the CRC bits check and if so provides them to the user otherwise an erasure is declared.

10 Having thus described the invention by reference to a preferred embodiment it is to be well understood that the embodiment in question is exemplary only and that modifications and variations such as will occur to those possessed of appropriate knowledge and skills may be made without departure from the spirit and scope of the invention as set forth in the
15 appended claims and equivalents thereof.

I CLAIM:

CLAIMS

1. A transmitter for transmitting data at a data rate in a plurality
2 of channels each having a capacity less than the data rate, the transmitter
comprising;
4 a controller for determining the capacity of each of a plurality
channels and selecting a data rate for each channel depending on the
6 determined capacity;
a plurality of transmission subsystems responsive to the controller
8 and each associated with a respective one of the plurality of channels for
scrambling encoded data with codes unique to the channel for transmission
10 in the channel; and
a variable demultiplexer responsive to the controller for
12 demultiplexing the encoded data into the plurality of transmission
subsystems at a demultiplexing rate derived from the data rates selected for
14 the channels by the controller.
2. A transmitter as claimed in claim 1, further comprising an
2 encoder for generating the encoded data from frames of data input thereto.
3. A transmitter as claimed in claim 1 or 2, wherein each
2 transmission subsystem comprises a symbol repetition unit for repeating
symbols to output the same at a rate corresponding to the rate selected for
4 the channel by the controller.
4. A transmitter as claimed in claim 3, wherein each transmission
2 subsystem comprises an interleaving unit for reordering the repeated
symbols depending on an interleaving format determined by the controller.
5. A transmitter as claimed in claim 4, further comprising a long
2 code generator for generating a respective long code for each channel; and
in each transmission subsystem, a scrambler for scrambling the reordered
4 symbols using the respective code for the channel.
6. A transmitter as claimed in claim 5, wherein the long code
2 generator comprises for each channel a decimator unit for decimating a
generated long code at a decimation rate determined by the controller so as
4 to produce the respective long codes for each channel.

7. A transmitter as claimed in claim 6, further comprising
2 variable coding units in each transmission subsystem for modulating the
scrambled symbols from the scrambler.

8. A transmitter as claimed in claim 7, wherein the coding units
2 are arranged to modulate the scrambled symbols with a respective walsh
code.

9. A transmitter as claimed in claim 7 or 8, further comprising a
2 pseudo noise spreader in each channel for spreading the modulated
symbols.

10. A transmitter as claimed in any preceding claim, further
2 comprising:

a switch; and

4 a plurality of carrier modulators, wherein the switch is responsive to
the controller for switching the scrambled data from the plurality of
6 transmission subsystems between the plural carrier modulators for
modulation of the signals onto different carriers at different times.

11. A receiver comprising:

2 a receiving circuit for receiving signals simultaneously in a plurality
of channels each of which signals define scrambled encoded symbols which
4 together represent data from a common origin;

a controller for determining a symbol rate for the signals in each
6 channel;

a plurality of receiving subsystems responsive to the controller and
8 each associated with a respective one of the plurality of channels for
descrambling encoded symbols with codes unique to the channel to enable
10 the data to be extracted therefrom; and

a variable multiplexer responsive to the controller for multiplexing
12 the data from the plurality of receiving subsystems at a multiplexing rate
derived from the symbol rates determined for the channels by the controller
14 onto an output.

12. A receiver as claimed in claim 11, further comprising an
2 decoder for decoding the encoded data output from the multiplexer into
frames of data.

13. A receiver as claimed in claim 11 or 12, further comprising a
2 pseudo noise despreader in each channel for despreading the scrambled
encoded symbols.

14. A receiver as claimed in claim 13, further comprising variable
2 decoding units in each receiving subsystem for demodulating the despread
symbols from the despreader.

15. A receiver as claimed in claim 14, wherein the decoding units
2 are arranged to demodulate the despread symbols with a respective walsh
code.

16. A receiver as claimed in claim 15, further comprising, in each
2 receiving subsystem, a descrambler for descrambling the despread symbols
using a respective long code for the channel.

17. A receiver as claimed in claim 16, wherein each receiving
2 subsystem comprises an deinterleaving unit for reordering the repeated
symbols depending on an interleaving format determined by the controller.

18. A receiver as claimed in claim 17, wherein each receiving
2 subsystem comprises a symbol combiner for combining symbols to output
the same to the demultiplexer at a rate corresponding to the rate determined
4 for the channel by the controller.

19. A receiver as claimed in any of claims 11 to 18, further
2 comprising:

a switch; and
4 a plurality of carrier demodulators, wherein the switch is responsive
to the controller for switching the received signals between the plural carrier
6 demodulators for demodulation of the signals into different receiving
subsystems at different times.

20. A wireless transmitter, comprising:
2 encoder for receive a set of information bits and encoding said
information bits to provide a set of code symbols; and
4 transmission subsystem for receiving said code symbols and for
providing a subset of said code symbols on a first carrier frequency and the
6 remaining symbols on at least one additional carrier frequency.

21. A method of transmitting data at a data rate in a plurality of
2 channels each having a capacity less than the data rate, the method
comprising;
4 determining the capacity of each of a plurality channels and selecting
a data rate for each channel depending on the determined capacity;
6 scrambling encoded data with codes unique to the channel for
transmission in the channel; and
8 demultiplexing the encoded data into the plurality of channels at a
demultiplexing rate derived from the data rates selected for the channels by
10 the controller.

22. A method as claimed in claim 21, further comprising an
2 encoder for generating the encoded data from frames of data input thereto.

23. A method as claimed in claim 21 or 22, further comprising
2 repeating symbols for each channel to output the same at a rate
corresponding to the rate selected for the channel.

24. A method as claimed in claim 23, further comprising
2 reordering the repeated symbols depending on a determined interleaving
format.

25. A method as claimed in claim 24, further comprising
2 generating a respective long code for each channel; and
scrambling the reordered symbols in each transmission subsystem
4 using the respective code for the channel.

26. A method as claimed in claim 25, wherein the long code is
2 generated for each by decimating a generated long code at a determined
decimation rate for each channel.

27. A method as claimed in claim 26, further comprising for
2 modulating the scrambled symbols with a code.

28. A method as claimed in claim 27, the scrambled symbols are
2 modulated with a respective walsh code.

29. A method as claimed in claim 27 or 28, further comprising
2 spreading the modulated symbols with pseudo noise.

30. A method as claimed in any of claims 21 to 29, further
2 comprising modulating the scrambled data onto different carriers at
different times.

31. A method of receiving data, the method comprising:
2 receiving signals simultaneously in a plurality of channels each of
which signals define scrambled encoded symbols which together represent
4 data from a common origin;
determining a symbol rate for the signals in each channel;
6 descrambling encoded symbols in each channel with codes unique to
the channel to enable the data to be extracted therefrom; and
8 multiplexing the descrambled data from the plurality of channels at a
multiplexing rate derived from the symbol rates determined for the
10 channels.

32. A method of receiving data as claimed in claim 31, further
2 comprising decoding the multiplexed encoded data into frames of data.

33. A method of receiving data as claimed in claim 31 or 32, further
2 comprising despread the scrambled encoded symbols using a pseudo
noise code.

34. A method of receiving data as claimed in claim 33, further
2 comprising demodulating the despread symbols by way of variable decoding.

35. A method of receiving data as claimed in claim 34, wherein the
2 despread symbols are demodulated with a respective walsh code.

36. A method of receiving data as claimed in claim 35, further
2 comprising descrambling the despread symbols in each channel using a
respective long code for the channel.

37. A method of receiving data as claimed in claim 36, further
2 comprising reordering the repeated symbols depending on a determined
interleaving format.

38. A method of receiving data as claimed in claim 37, further
2 comprising combining symbols in a channel before demultiplexing the same
at a rate corresponding to the rate determined for the channel.

39. A method of receiving data as claimed in any of claims 31 to 38,
2 further comprising:
demodulating the signals in different channels at different times.

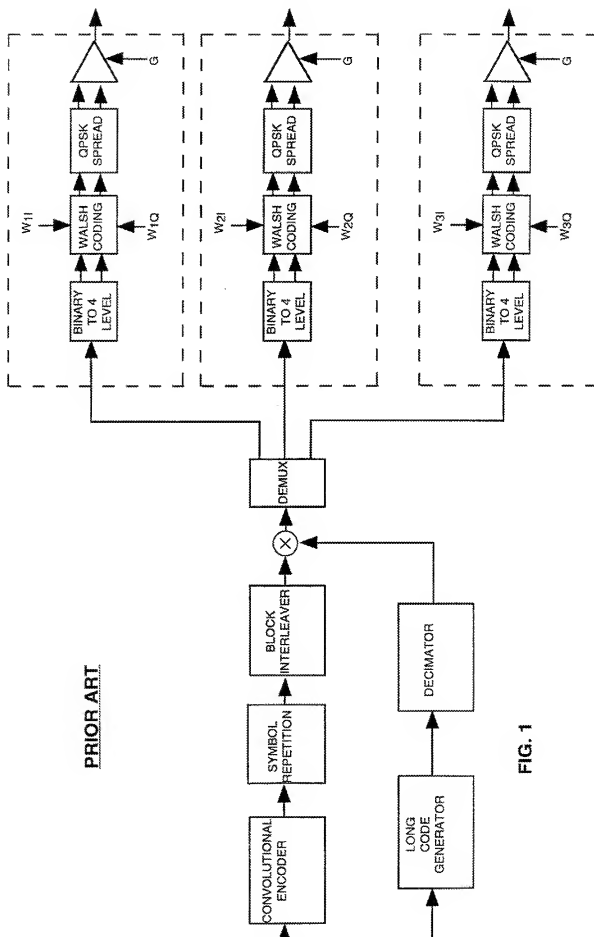


FIG. 1

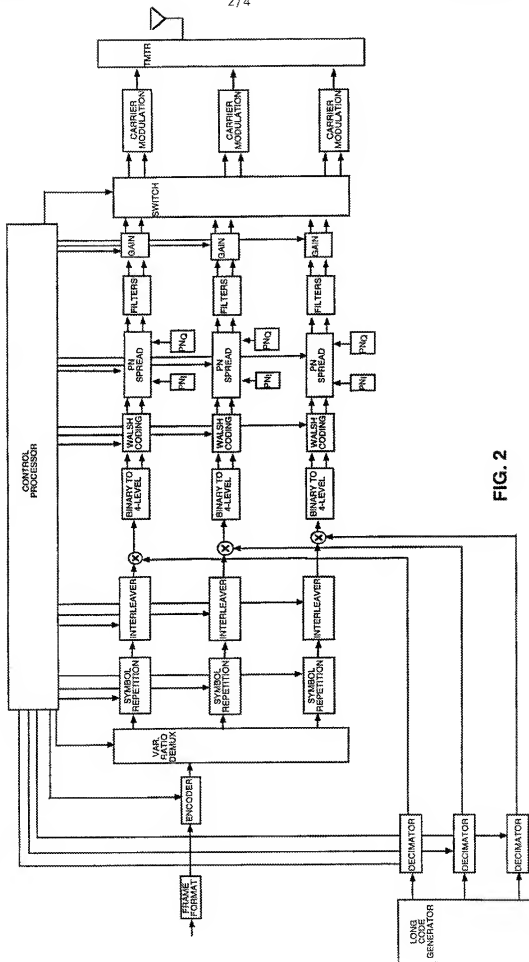


FIG. 2

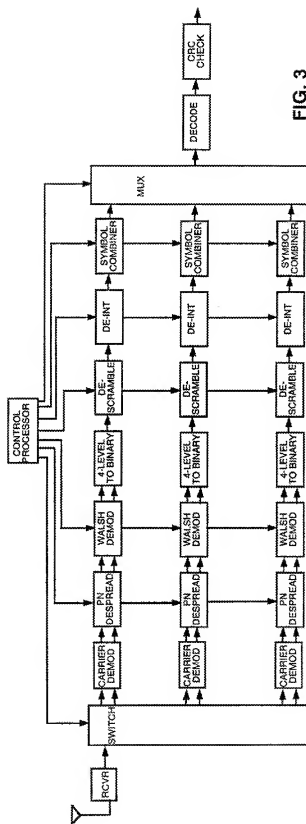


FIG. 3

Walsh Chip within a Walsh Function

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000
--	---	---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------

FIG. 4

PCT/US 98/19335

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04J11/00 H04J13/02 H04L27/26 H04L5/02 H04L25/03

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04J H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category ^a	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CHEN Q ET AL: "MULTICARRIER CDMA WITH ADAPTIVE FREQUENCY HOPPING FOR MOBILE RADIO SYSTEMS" IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATIONS, vol. 14, no. 9, December 1996, pages 1852-1858, XP000639647 see abstract see page 1852, column 1, line 1 - line 18 see page 1852, column 2, line 10 - line 42 see page 1853, column 1, line 3 - page 1854, column 1, line 7	1-19, 21-39
X	see page 1854, column 2, line 13 - line 60 -/-	20

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.^a Special categories of cited documents:^a "A" document defining the general state of the art which is not considered to be of particular relevance^a "E" earlier document but published on or after the international filing date^a "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)^a "O" document referring to an oral disclosure, use, exhibition or other means^a "P" document published prior to the international filing date but later than the priority date claimed^a "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention^a "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone^a "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.^a "Z" document member of the same patent family

Date of the actual completion of the international search

19 January 1999

Date of mailing of the international search report

28/01/1999

Name and mailing address of the ISA

European Patent Office P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Chauvet, C

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 410 538 A (ROCHE JAMES R ET AL) 25 April 1995 see abstract see column 1, line 67 - column 2, line 49	1-19, 21-39
X	see column 7, line 31 - column 9, line 3	20
A	WO 96 27250 A (QUALCOMM INC) 6 September 1996 cited in the application see abstract see page 3, line 22 - page 4, line 25 see page 7, line 22 - line 31 see page 8, line 7 - line 12 see page 8, line 29 - line 39 see page 9, line 19 - page 14, line 2	1-39
A	US 5 608 725 A (PENDLETON MATTHEW A ET AL) 4 March 1997 see abstract see column 3, line 5 - column 4, line 43	1-39

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5410538 A	25-04-1995	NONE	
WO 9627250 A	06-09-1996	AU 5028296 A	18-09-1996
		CA 2213998 A	06-09-1996
		EP 0812500 A	17-12-1997
		US 5777990 A	07-07-1998
		ZA 9601025 A	16-07-1996
US 5608725 A	04-03-1997	NONE	

(51)Int.CL ⁷	識別記号	F I	テマコード [*] (参考)
H 0 4 J 13/04		H 0 4 L 27/20	C 5 K 0 0 4
H 0 4 L 27/20		H 0 4 J 13/00	G 5 K 0 2 2

審査請求 未請求 予備審査請求 有 (全 34 頁)

(21)出願番号 特願2000-512302[P2000-512302]
 (86) (22)出願日 平成10年9月16日(1998.9.16)
 (85)優先権主張日 平成12年3月16日(2000.3.16)
 (86)国際出願番号 P C T / U S 9 8 / 1 9 3 3 5
 (87)国際公開番号 W O 9 9 / 1 4 8 7 8
 (87)国際公開日 平成11年3月25日(1999.3.25)
 (31)優先権主張番号 0 8 / 9 3 1 , 5 3 6
 (32)優先日 平成9年9月16日(1997.9.16)
 (33)優先権主張国 米国 (U S)


(71)出願人 クアルコム・インコーポレイテッド
 QUALCOMM INCORPORATED
 アメリカ合衆国、カリフォルニア州
 92121-1714、サン・ディエゴ、モアハウス・ドライブ 5775
 (72)発明者 ジョウ、ユー・チュン
 アメリカ合衆国、カリフォルニア州
 92129 サン・ディエゴ、リバーヘッド・ドライブ 9979
 (74)代理人 弁理士 鈴江 武彦 (外4名)
 Fターム(参考) 5K004 AA05 FA05
 5K022 EE02 EE11 EE22 EE31

最終頁に続く

(54)【発明の名称】 複数の搬送波システムでデータを送信するための方法および装置

(57)【要約】

【解決手段】 多重搬送波システムでデータ送信する装置における方法は、データをエンコードし、得られたエンコードシンボルを分配して異なる周波数で送信することを含む。送信機は、複数のチャネルの各々の容量を決定し決定された容量に基づいて各チャネルに対するデータレートを選択する制御プロセッサ(50)を具備する。複数の送信サブシステム(56~72)は前記制御プロセッサ(50)に応答可能である。各送信サブシステムは複数のチャネルのそれぞれ1つと関係し、チャネル中で送信するために、エンコードされたデータをチャネルに特有なコードでスクランブルする。可変比デマルチプレクサ(56)は、制御プロセッサ(50)の制御下において、コントローラによりチャネルに対して選択されたデータレートから得られたデマルチプレクサレートで、エンコードされたデータをデマルチプレクスして複数の送信サブシステムに入れる。送信サブシステムの他の態様において、エンコードシンボルは、送信されるべきデータのシンボルレートを一定に保つシンボル反復手段(58)に提供される。さらなる他の態様において



【國際調查報告】

INTERNATIONAL SEARCH REPORT

INFORMATION CLASSIFICATION No PCT/US 98/19335		
A. CLASSIFICATION OF SUBJECT MATTER IPC 6 H04J11/00 H04J13/02 H04L27/26 H04L5/02 H04L25/03		
According to International Patent Classification (IPC) as to both reference classification and IPC		
B. FIELD(S) SEARCHED Minimum documentation searched (classification system followed by classification symbol) IPC 6 H04J H04L		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category ¹	Citation of document, with indication, where appropriate, of the relevant passages Relevant to claim no.	
A	CHEN Q ET AL: "MULTICARRIER CDMA WITH ADAPTIVE FREQUENCY HOPPING FOR MOBILE RADIO SYSTEMS" IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATIONS, VOL. 14, no. 9, December 1996, pages 1852-1858, XP000639647 see abstract see page 1852, column 1, line 1 - line 18 see page 1852, column 2, line 10 - line 42 see page 1853, column 1, line 3 - page 1854, column 1, line 7 see page 1854, column 2, line 13 - line 60	1-19, 21-39
X	see page 1854, column 2, line 13 - line 60	20
-/-		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of page C.		
<input checked="" type="checkbox"/> Patent family members are listed in annex.		
1. Special categories of cited documents:		
A ¹ document defining the general state of the art which is not contemplated to be of particular relevance	T ¹ prior document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
C ¹ earlier document but published on or after the international filing date	X ¹ document of particular relevance the claimed invention cannot be considered novel or cannot be considered to involve an inventive step without the document A. (where some documents are considered to involve an inventive step, even the documents, as mentioned with one or more other cited documents, must be considered being obvious to a person skilled in the art)	
L ¹ documents which may throw doubts on priority right(s) or which is cited to establish the publication date or priority date or other special status (date, not cited)	Y ¹ document of particular relevance the claimed invention cannot be considered to involve an inventive step without the document A. (where some documents are considered to involve an inventive step, even the documents, as mentioned with one or more other cited documents, must be considered being obvious to a person skilled in the art)	
O ¹ document relating to an oral disclosure, use, exhibition or other means	B ¹ document member of the same patent family	
P ¹ document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search	Date of mailing of the international search report	
19 January 1999	28/01/1999	
Name and mailing address of the ISA European Patent Office, P. B. 5010, Karlsruhe 2 NL - 2280, 191, Haren Tel. (+31-70) 340-0100, Telex 31651 epo nl Fax (+31-70) 340-0106	Authorized officer Chauvet, C	

Form PCT/ISAE: Report drawn (July 1992)

INTERNATIONAL SEARCH REPORT

C. Contribution DOCUMENTS CONSIDERED TO BE RELEVANT		International No. PCT/US 98/19335
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 410 538 A (ROCHE JAMES R ET AL) 25 April 1995 see abstract see column 1, line 67 - column 2, line 49 see column 7, line 31 - column 9, line 3	1-19, 21-39
X		20
A	WO 96 27250 A (QUALCOMM INC) 6 September 1996 cited in the application see abstract see page 3, line 22 - page 4, line 25 see page 7, line 22 - line 31 see page 8, line 7 - line 12 see page 8, line 29 - line 39 see page 9, line 19 - page 14, line 2	1-39
A	US 5 508 725 A (PENDLETON MATTHEW A ET AL) 4 March 1997 see abstract see column 3, line 5 - column 4, line 43	1-39

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/US 98/19335

Patent document class in search report		Publication date	Patent family member(s)	Publication date
US 5410538	A	25-04-1995	NONE	
WO 9627250	A	06-09-1996	AU 5028295 A CA 2213998 A EP 0812500 A US 5777990 A ZA 9601025 A	18-09-1996 06-09-1996 17-12-1997 07-07-1998 16-07-1996
US 5608725	A	04-03-1997	NONE	